PUBLIC ADDRESS / SPEAKERS / SURFACE

SONORA-5B16

LOW IMPEDANCE SURFACE SPEAKER

IP66

- Crisp, distortion-free sound
- Excellent finish and elegant design
- IP-66 protection and salt fog
- Quick and easy installation

+ Info:
https://fonestar.com/SONORA-5B16

ESPECIALLY RECOMMENDED IN:

Hospitality

Education

Hotels

All sectors

DESCRIPTION

5 ¼" surface speaker. 40 W RMS@16Ohm. IP-66 protection and salt fog. Adjustable fixing mount. Steel safety cable.

TECHNICAL CHARACTERISTICS

FEATURES	Low-impedance loudspeaker. Prepared for outdoor use, with IP-66 protection.
POWER	80 W max., 40 W RMS
SPEAKERS	1 x 5 ¼" polypropylene woofer 1 x 1" tweeter
RESPONSE	80-20,000 Hz
IMPEDANCE	16 Ohm
SENSITIVITY	88.3 dB @ 1 W/1 m
MAXIMUM ACOUSTIC PRESSURE	102.2 dB @ máx. W/1 m
COVERAGE ANGLE	H/V: 200°/200°@500Hz, 135°/135°@1kHz, 100°/120°@2kHz, 60°/80°@4kHz (-6 dB)
PROTECTIONS	IP-66 in compliance with EN 60529 IEC 60068-2-11 Enviromental Test (Salt mist)
MATERIAL	ABS (UV resistance) Aluminium mesh grille, with powder-coated finish Weather-resistant mount A2 stainless steel screws
CONNECTORS	Euroblock
TEMPERATURE RANGE	-10°C ~ 60°C
COLOUR	White (RAL 9003)
DIMENSIONS	Speaker: 162 x 263 x 147 mm depth Support wall plate: 68 x 110 mm Speaker with support: 216 mm depth
WEIGHT	1.65 kg
ACCESSORIES	Adjustable fixing mount ± 60° in all directions. Steel safety cable

+ Info:
https://fonestar.com/SONORA-5B16

Impedance vs Frequency

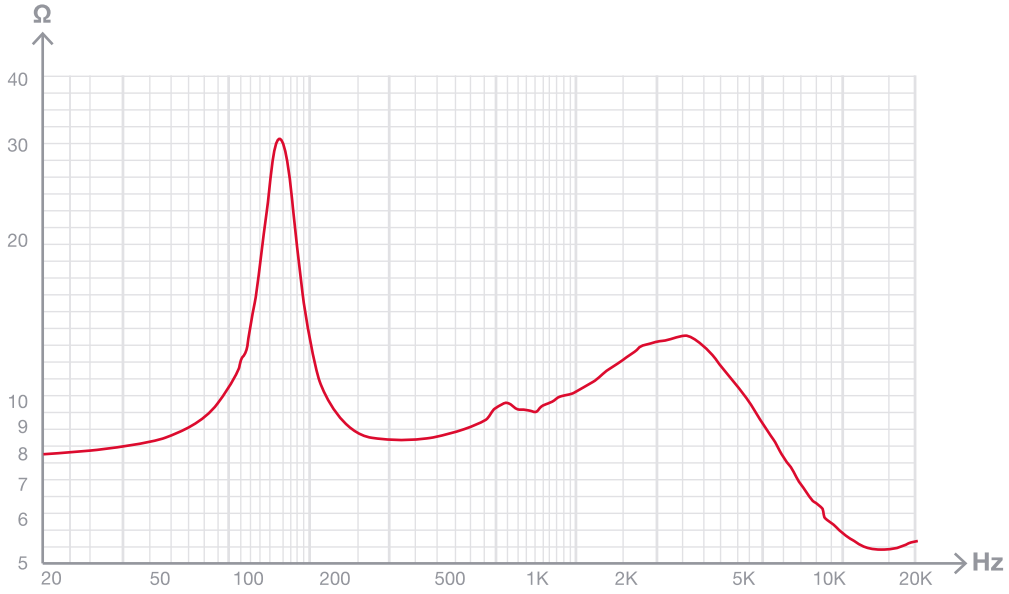

SPL vs Frequency

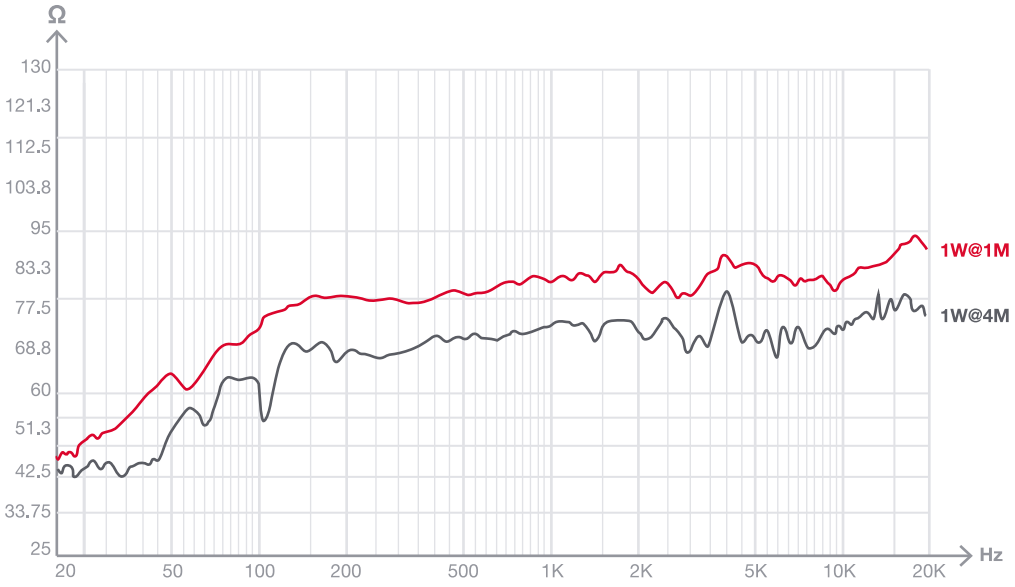

+ Info
https://fonestar.com/SONORA-5B

SPL vs Angle

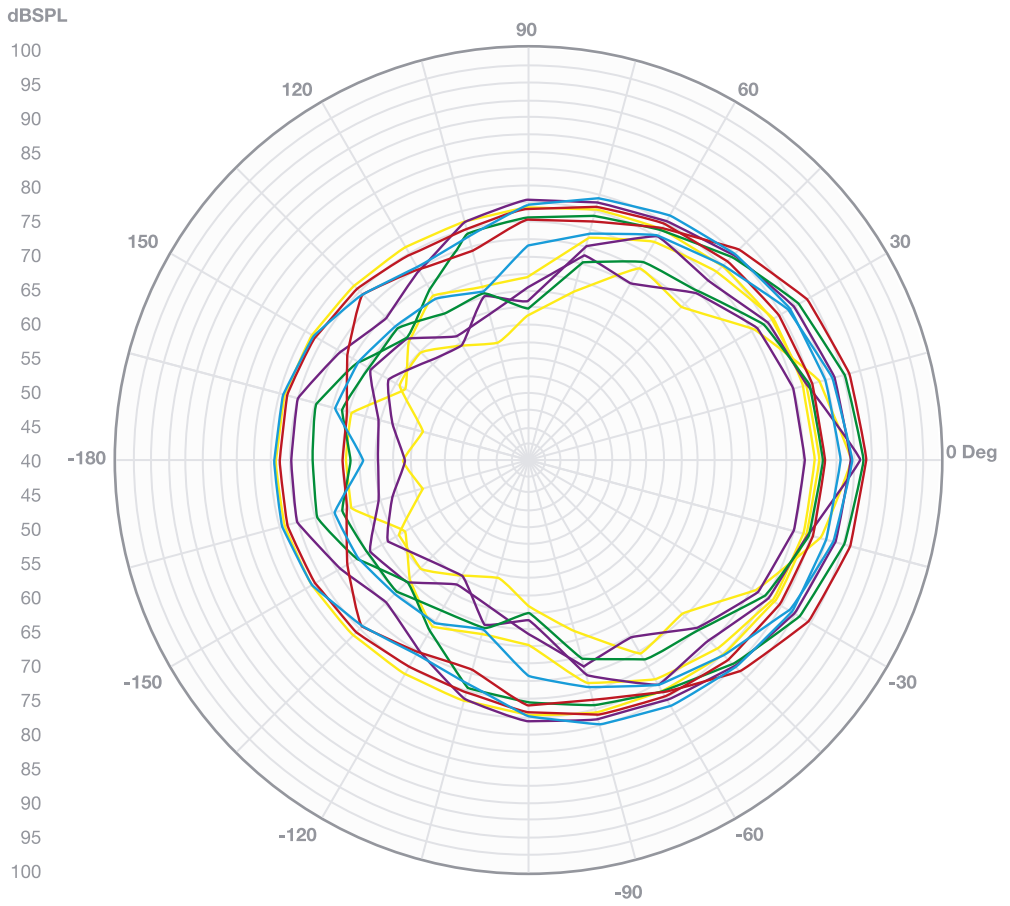

Curve	Freq.	BW	Q	DI
	441.94	360	1	0.0
	625.00	120	3.0	4.8
	883.88	150	2.4	3.8
	1.25K	120	3.0	4.8
	1.77K	90	4.0	6.0
	2.50K	60	6.0	7.8
	3.54K	60	6.0	7.8
	5.00K	90	4.0	6.0
	7.07K	90	4.0	6.0
	10.00K	60	6.0	7.8
	14.14K	60	6.0	7.8
	20.00K	60	6.0	7.8
	28.28K	60	6.0	7.8
	40.00K	60	6.0	7.8

+ Info
https://fonestar.com/SONORA-5B

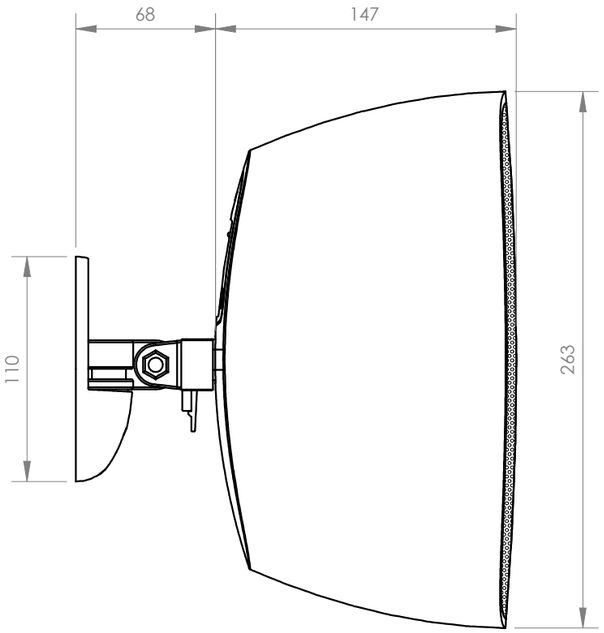

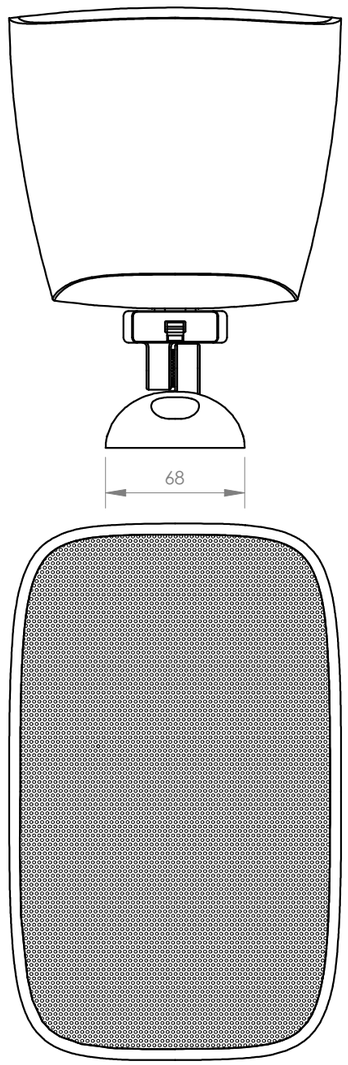

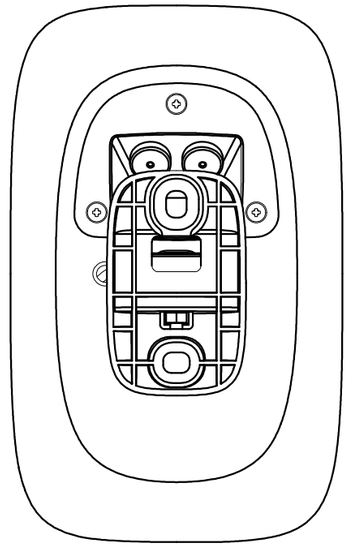

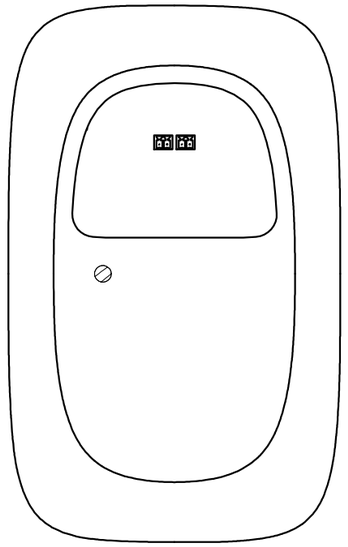

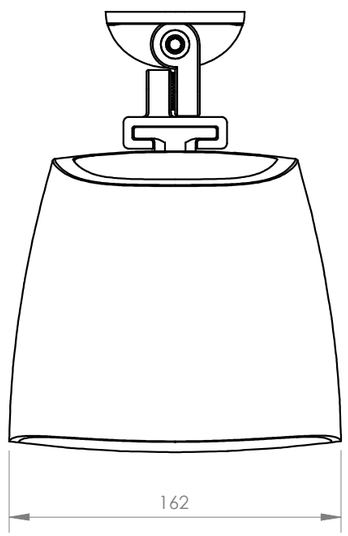

FONESTAR	Model SONORA-5B16-SONORA-5N16	Description LOW IMPEDANCE SURFACE SPEAKER	Units mm	Scale 1:3